




# State of the Art, Inc.

## Zero Ohm Chip Resistor

### MIL-PRF-32159/11 Solderable RCZ0402



### Performance

Power Rating	40 mW
Operating Range	-65 to 150°C
Product Levels	M & T
Current Rating	1.2 A
Maximum Resistance	0.030 Ω



**MIL-PRF-32159** provides zero ohm chip resistors (jumpers) at two product levels: military M and space level T. Both levels are subject to Group A, B, and C lot acceptance testing. While Group C does include a 2000 hour life test, it does not accumulate enough unit hours to provide an established reliability failure rate level.

**Military level M** is subject to Group A on a production lot basis while Groups B and C are performed on an inspection lot basis.

**Space level T** is subject to Groups A and B on a production lot basis while Group C is performed on an inspection lot basis. Group A includes 100% power conditioning to screen infant mortality.

### Lot Acceptance Testing

Group A	Group B
Precap Visual	Short Time Overload
Thermal Shock	Mounting Integrity
Power Conditioning (space level only)	
DC Resistance	Group C
Visual Inspection	Life (2000 hours)
Solderability	Thermal Shock
Resistance to Solvents	Low Temperature Operation
	Resistance to Mounting
	Moisture Resistance
	High Temperature Exposure

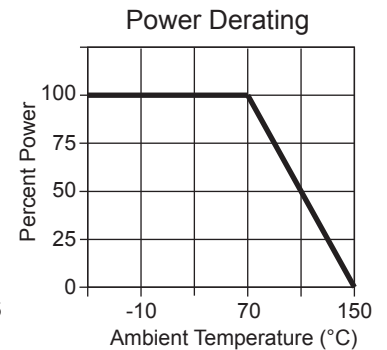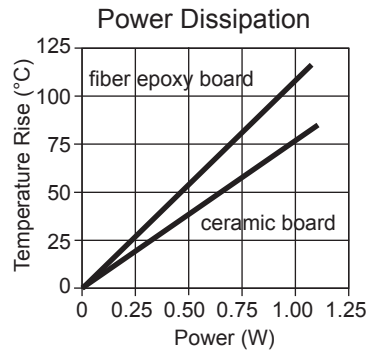

### Part Number

## M32159B11M -TR

Packaging: -TR: Tape & Reel -W: Waffle Tray

Product Level: M: Military T: Space

Size: 11: RCZ0502

Termination Material: B: Solderable (SnPb solder over nickel)


Performance Specification MIL-PRF-32159

### Mechanical

	Inches	Millimeters
Length (a)	.042(.034 - .050)	1.07(0.86 - 1.27)
Width (b)	.022(.017 - .027)	0.56(0.43 - 0.69)
Thickness (c)	.018(.010 - .033)	0.46(0.25 - 0.84)
Top Termination (d)	.007(.005 - .015)	0.18(0.13 - 0.38)
Bottom Termination (e)	.009(.005 - .015)	0.24(0.13 - 0.38)

Approximate Weight 0.00108 g

Recommended Minimum Bond Pads (inches)

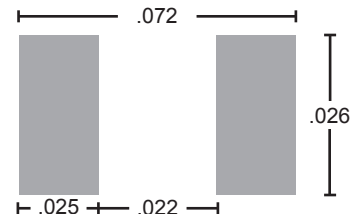

**State of the Art, Inc.** 2470 Fox Hill Road, State College, PA, USA 16803-1797

www.resistor.com Telephone: 814-355-8004 Toll Free: 800-458-3401 Fax: 814-355-2714

Specifications Subject to Change Without Notice

All Products Made in the USA

Copyright 2015 by State of the Art, Inc.