State of the Art, Inc. Zero Ohm Chip Resistor MIL-PRF-32159/05 Epoxy Bondable RCZ2208

Performance

Power Rating Operating Range Product Levels	-(225 mW 65 to 150° M & T	С
Termination Material	G	C	U
Current Rating	2.5 A	2.1 A	1.1 A
Maximum Resistance	0.035 Ω	0.050 Ω	0.175 Ω

MIL-PRF-32159 provides zero ohm chip resistors (jumpers) at two product levels: miltary M and space level T. Both levels are subject to Group A, B, and C lot acceptance testing. While Group C does include a 2000 hour life test, it does not accumulate enough unit hours to provide an established reliability failure rate level.

Military level M is subject to Group A on a production lot basis while Groups B and C are performed on an inspection lot basis.


Space level T is subject to Groups A and B on a production lot basis while Group C is performed on an inspection lot basis. Group A includes 100% power conditioning to screen infant mortality.

Lot Acceptance Testing

Group A
Precap Visual
Thermal Shock
Power Conditioning
(space level only)
DC Resistance
Visual Inspection
Solderability
Resistance to Solvents

Group B Short Time Overload Mounting Integrity

Group C Life (2000 hours) Thermal Shock Low Temperature Operation Resistance to Mounting Moisture Resistance High Temperature Exposure

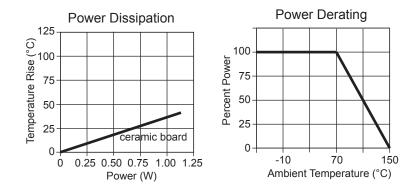

Part Number

M32159C05M -TR

	Packaging: -TR: Tape & Reel -W: Waffle Tray					
	Product Level: M: Military T: Space					
	Size: 05: RCZ2208					
	Termination Material: C: Epoxy Bondable Silver U: Epoxy Bondable Platinum Gold G: Epoxy Bondable Gold					
Performance Specification MIL-PRF-32159						

Mechanical

Length (a) Width (b) Thickness (c) Top Termination (d) Bottom Termination (e) Approximate Weight	Inches .225(.223237) .070(.070080) .028(.015033) .020(.015025) .020(.015025) 0.02620 g	Millimeters 5.72(5.66 - 6.02) 1.78(1.78 - 2.03) 0.71(0.38 - 0.84) 0.51(0.38 - 0.64) 0.51(0.38 - 0.64)	Recommended Minimum Bond Pads (inches)		
State of the Art, Inc. 2470 Fox Hill Road, State College, PA, USA 16803-1797 www.resistor.com Telephone: 814-355-8004 Toll Free: 800-458-3401 Fax: 814-355-2714 Specifications Subject to Change Without Notice All Products Made in the USA Copyright 2015 by State of the Art, Inc.					