




State of the Art, Inc.



3838 High Voltage Chip Resistor

Thick Film, Solderable, Surface Mount Resistor

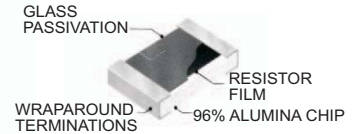

PERFORMANCE CHARACTERISTICS



Resistance Range	22 kΩ - 100 MΩ
Tolerance	±1%, ±2%, ±5%, ±10%
TCR	±100, ±200, ±300 ppm/°C
Thermal Resistance	22.5 °C/W
Maximum Power	3 W
Maximum Voltage	5000 V

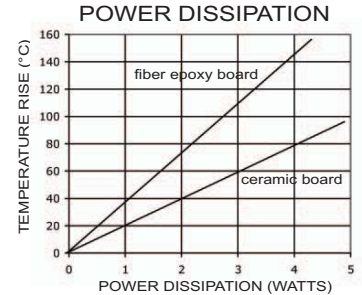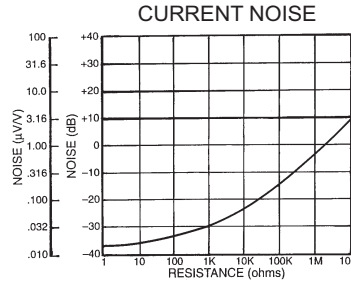

ENVIRONMENTAL PERFORMANCE (2)

Thermal Shock	±0.03%
Low Temperature Operation	±0.03%
Short-time Overload	±0.03%
Resistance to Bonding Exposure	±0.03%
Moisture Resistance	±0.05%
High Temperature Exposure	±0.05%
Life Test	See Chart

(2) Typical resistance change, test methods and criteria per MIL-PRF-55342.

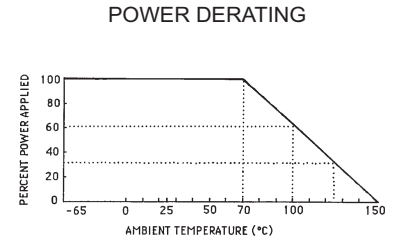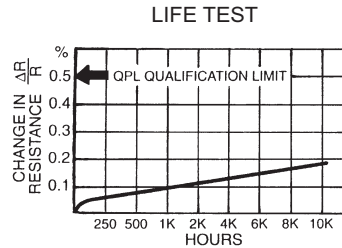

PART NUMBERING

S3838CVX1006F30 -TR

PACKAGING CODE: - TR = Tape/Reel - W = Waffle Carrier (Default packaging is Bulk)

TEMPERATURE CHARACTERISTIC: 10: ±100 ppm 20: ±200 ppm 30: ±300 ppm

TOLERANCE: F: 1% G: 2% J: 5% K: 10% M: 20%

RESISTANCE VALUE:

Four digits are used for tolerances of 1% or lower, three digits are used above 1%. Leading digits are significant while the last digit specifies the number of zeros to add. The letter "R" is used to represent the decimal for fractional ohmic values. Example: 5R6 is 5.6 ohms.

TERMINATION FINISH: X: SN60 (40% Pb) Solder Over Nickel Barrier, Y: Silver Over Nickel Barrier (RoHS)

PRODUCT DESIGNATION: V: High Voltage

TERMINATION TYPE: C: Wraparound termination


SIZE CODE

GRADE: S: Standard Production H: High Reliability (For Screening options, contact the factory)

MECHANICAL

	INCHES	MILLIMETERS
Case Length	.375 (.373-.383)	9.52 (9.47-9.73)
Case Width	.375 (.373-.383)	9.52 (9.47-9.73)
Case Height	.028 (.023-.033)	0.71 (0.58-0.84)
Top Term.	.034 (.029-.039)	0.86 (0.74-0.99)
Bottom Term.	.069 (.064-.074)	1.75 (1.63-1.88)
Bottom Gap	.237 (.233-.241)	6.02 (5.92-6.12)
Approximate Mass	0.25 grams	

Specifications subject to change without notice.

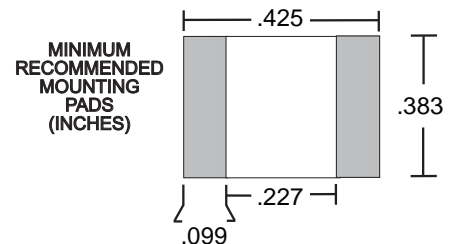

STATE OF THE ART, INC. 2470 Fox Hill Road, State College, PA 16803-1797

Phone (814) 355-8004 Fax (814) 355-2714 Toll Free 1-800-458-3401

www.resistor.com

120319