


# State of the Art, Inc.

## Thick Film Chip Resistor

### M55342/08 RM2010



## PERFORMANCE

Resistance Range **1Ω - 22MΩ**  
 Tolerances **1%, 2%, 5%, 10%**  
 Maximum Power **800 mW**  
 Maximum Voltage **150 Volts**

### TESTS


TCR (-55 to +125 °C) in ppm/°C  
 Thermal Shock  
 Low Temperature Operation  
 Short-time Overload  
 Resistance to Soldering Heat  
 Moisture Resistance  
 Life, 2,000 Hours  
 High Temperature Exposure

### CHARACTERISTICS\*


	<b>K</b>	<b>M</b>
TCR (-55 to +125 °C) in ppm/°C	±100	±300
Thermal Shock	±0.5%	±0.5%
Low Temperature Operation	±0.25%	±0.5%
Short-time Overload	±0.25%	±0.5%
Resistance to Soldering Heat	±0.25%	±0.25%
Moisture Resistance	±0.5%	±0.5%
Life, 2,000 Hours	±0.5%	±2.0%
High Temperature Exposure	±0.5%	±1.0%

\*Maximum allowable change per MIL-PRF-55342, typical change is 10% of these values.


CURRENT NOISE

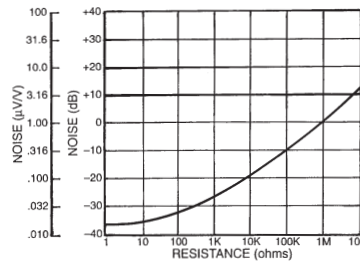


POWER DISSIPATION

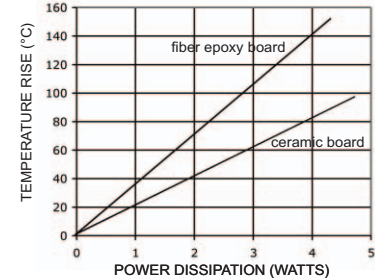

LIFE TEST

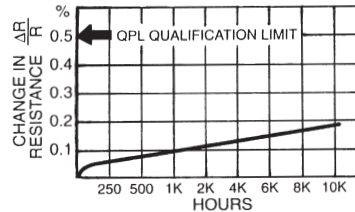

POWER DERATING

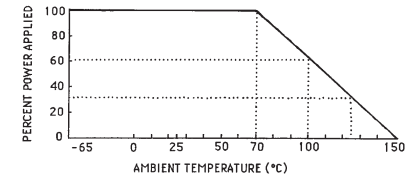

## PART NUMBERING

**M55342 K 08 B 100D S - TR**

PACKAGING CODE: TR = Tape & Reel W= Waffle Pack

PRODUCT LEVEL DESIGNATOR: M: 1% per 1000 hrs. R: 0.01% P: 0.1% S: 0.001% T: Space Level C: Non - ER

RESISTANCE AND TOLERANCE CODE:

Three significant digits, with a letter indicating the decimal location, the tolerance, and the value range.

D: 1% Ω      G: 2% Ω      J: 5% Ω      M: 10% Ω  
 E: 1% K Ω    H: 2% K Ω      K: 5% K Ω      N: 10% K Ω  
 F: 1% M Ω    T: 2% M Ω      L: 5% M Ω      P: 10% M Ω

TERMINATION MATERIALS:

B: Solderable wraparound C: Epoxy bondable palladium/silver wraparound U: Epoxy bondable platinum/gold wraparound  
 W: Gold wire bondable G: Gold wraparound

SIZE CODE: /08 = RM2010


TEMPERATURE CHARACTERISTIC: K: ± 100ppm M: ± 300ppm

PERFORMANCE SPECIFICATION MIL-PRF-55342

## MECHANICAL

	INCHES	MILLIMETERS
Length	.202 (.191 - .218)	5.13 (4.85 - 5.54)
Width	.094 (.093 - .103)	2.38 (2.36 - 2.62)
Thickness	.025 (.015 - .033)	0.64 (0.38 - 0.84)
Top Term	.020 (.015 - .025)	0.51 (0.38 - 0.64)
Bottom Term	.019 (.015 - .025)	0.48 (0.38 - 0.64)
Gap	.164 (.160 - .168)	4.17 (4.06 - 4.27)
Approx. Weight	.0323 grams	

MINIMUM RECOMMENDED MOUNTING PADS (INCHES)



State of the Art, Inc. 2470 Fox Hill Road, State College, PA 16803-1797  
 Phone (814) 355-8004 Fax (814) 355-2714 Toll Free 1-800-458-3401

04/09/08

\*Specifications subject to change without notice.\*

www.resistor.com